



RESIDENTIAL COLLECTION



Precision application of quiet ambiance.

1" STEP & MARKER

In-Grade Series

1" STEP & MARKER
In-Grade Series



The ultra-compact 1" Step and Marker delivers full optical precision from a one-inch in-grade form. The 1.7 watt LED fixture is machined from solid brass and provides 150 lumens with beam options of 20°, 35°, and 60°.

Compact and discreet, it installs cleanly into steps, markers, and architectural elements with uniform, glare-controlled illumination and durable, marine-grade brass construction.



**Designed for steps,
markers, and architecture**



Compact size and a screwless bezel allow discreet use in steps, markers, and architectural details. The fixture provides uniform light with controlled glare and clean integration.



Diminutive in stature. Expansive performance.

At just one inch, the low profile bezel and focused optics allow the fixture to seamlessly blend into steps, marker positions, and other architectural features for a quiet visual experience.

1" STEP & MARKER
In-Grade Series

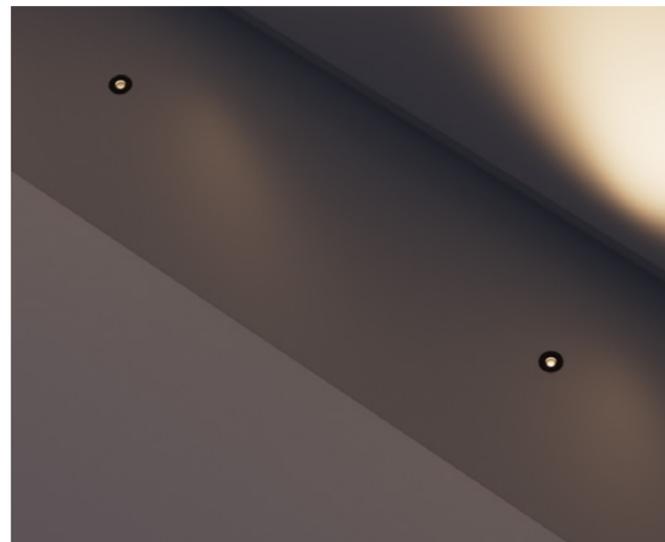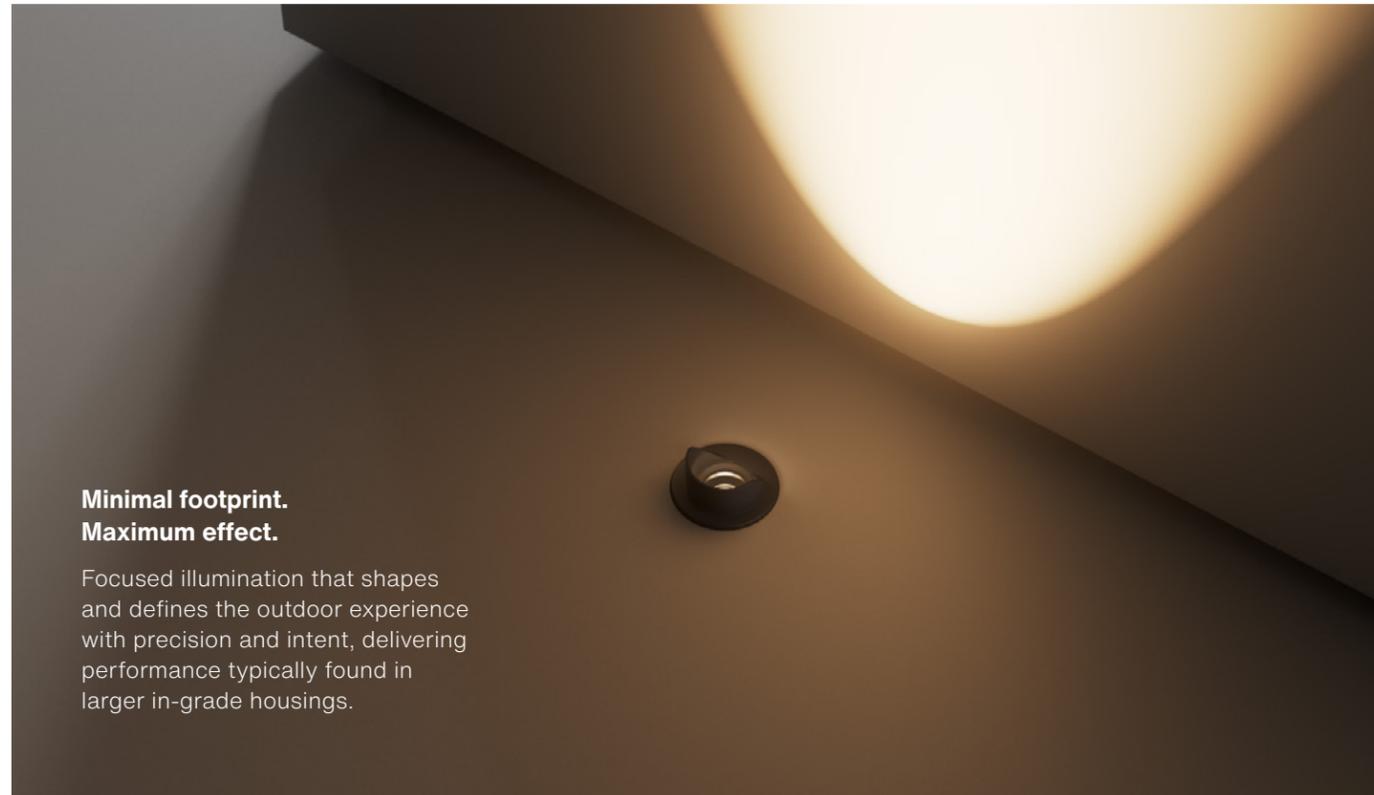

Easy installation for that perfect alignment

Installs in any nominal one-inch drilled hole. Placement in soil, decking, or concrete is simple, and the rotational aim system aligns the fixture cleanly without tools.



Discreet design, bold results

The 1" Step & Marker blends into its surroundings. Focused light and refined optics reveal architectural detail without distraction.



Built to last in solid brass

Machined from marine-grade brass and sealed to IP68. The 1" Step & Marker endures harsh environments and maintains finish integrity and watertight performance.



1" STEP & MARKER

In-Grade Series



STANDARD, DIRECT VIEW

Focused accent for architecture and landscape details.



GLARE SHIELD

Controlled illumination with reduced glare and soft contrast.



TOP COVER 360°

Uniform light for smaller surfaces and safe passage.



TOP COVER 180°

Half-beam light for pathways, steps, and edges.

ARTOGL1

Installation Diameter	0.98" dia.			
Bezel Diameter	1.50" dia.			
Optics	Narrow (20°), Medium (35°), Wide (60°)		Shield Optimized	
Light Aimability	Full 360° rotation			
Voltage	12V			
Watts (Lumens)	1.7W (150lm)			
Light Engine	HK LED			
Light Quality	CRI 90			
CCT Options	2700K, 3000K			
Material	Solid corrosion-resistant brass with stainless steel hardware			
Finish	Black Powder Coated Brass or Bronze Powder Coated Brass			
Dimming	MLV or ELV Phase Control			
Rated LED Life	50,000 hours			
Drive-Over Rated	Yes	No	No	Yes
Dark Sky Compliant	No	No	Yes	Yes
Listings	CSA Listed for Wet Location, IP68. RoHS Compliant			

Architectural quality, simplified

All configurations ship with prewired leads and included accessories. The Integrated LED, shallow housing, and PVC sleeve reduce installation times, effort, and total project commissioning costs.



RESIDENTIAL COLLECTION

Amal K

Designed to inspire.
Built to endure.